



NEW
Q3 2023



GULLIVER/N

Automation for industrial sliding gates up to
4000 Kg

Available with single-phase motor 230 V or
three-phase motor 415 V



THE PRODUCTS

SWING GATES

Automations for swing gates



STING



LOOK



GEKO



LIVI 502



GHOST 100/200



OLI N



MAC



ROCK



Automations for sectional doors



SPACE N



ADVANCE N



LIVI 902



Bollards

Automations for sliding gates



LIVI N



REV



GULLIVER/N



PASS N



Barriers



STOP N



TRAFIK/N



Automations for industrial gates




LATO



550 PL



DIMENSIONS

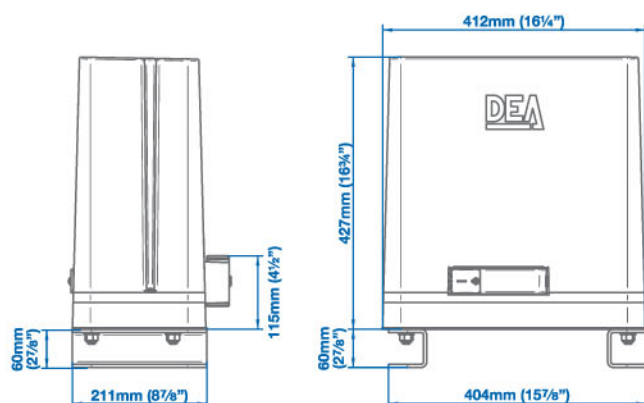

Simple unlocking system by key



Magnetic limit switches

ACCESSORIES



Art. 113

Galvanized steel rack 1000x30x10mm with zinc-plated spacers.



Art. M6

M6 Livi galvanized gear M=6Z=12Øe=84.



LINEAR/XS

Pair of mini synchronizable photocell for outdoor installation. Maximum range 20m.

TECHNICAL INFORMATION

Model	GULLIVER/N/M	GULLIVER/N/3P/IB
Motor power supply (V)	230 V a.c.	380 AC up to 415AC
Capacity (W)	860	1650
Incorporated condenser (uF)	30 uF	—
Duty cycle (cycles/hour) for a 12m lcf length	13	18 (2m/minn - 60%) 28 (20m/mim - 100%)
Max thrust (N)	1300	1530
Max gate weight (Kg)	2000 up to 3000	3000 up to 4000
Motor thermal protection (°C)	140°C	
Operating temperature range (°C)	-20° ÷ 50°	
Opening speed (m/min)	10.4	12 ÷ 20
Standard pinion	Z=18 (m=4mm)	
Weight of product with package (Kg)	30	
Sound pressure emitted (dBA)	< 70	
Protection degree	IP55 (IPX0 for /IB versions)	

DEALER STAMP



ISO 9001 certified company
Certificate n. 50 100 5350



DEA SYSTEM S.p.A.

Automation for gates, doors and barriers

Via della Tecnica, 6 - 36013 PIOVENE ROCCHETTE (VI) - ITALY
Telefono: +39 0445 550789 - Fax: +39 0445 550265
www.deasystem.com - info@deasystem.com