

BENCORE

AUTOMATIC GATE DRIVER



DC24V
LOW VOLTAGE
OPERATED



**DUAL
SPEED**



SAFETY
AUTO REVERSE



**ULTRA
RELIABLE**



Installation Mockup



SLIDING GATE OPERATOR

BENCORE
As good as its get

Dimension (mm) :-

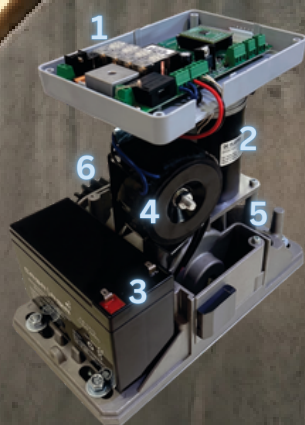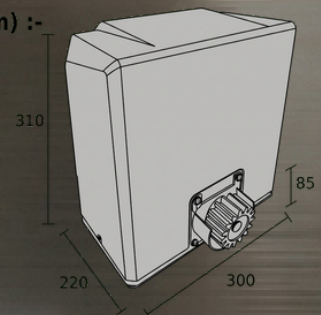

1. Electronic Control Panel
2. Bencore Motor
3. Backup Battery
4. Power Transformer
5. Grease Type Gear Box
6. Pinion Gear

Some changes may have happened to the product after this brochure is printed. The appearance and feature of the actual product may be slightly different from the illustration.

reserves the right to make technical changes to the product without notice.

M800 M4P120	DC24V for normal speed DC12V for cushioning speed	
Operating Voltage	200W	250W
Max. Output Power	800kg	1200kg
Max. Weight of Gate	10 meter	
Max. Length of Gate	Counter Sensor	
DSPC Device	Grease Type Alloy Base	
Lubrication	Electronic current sensing	
Safety Clutch	12V 7AH	
Backup Battery	Infrared beam sensor (Optional)	
Safety Barrier	AC110V/220V, 60Hz/50Hz	
Main Supply	Microcomputer based	
Electronic Controller	UHF Digital PWM type	
Remote Controller	0°C to 80°C	
Temperature		