

BULLMAC

AUTOMATIC GATE DRIVER



DC24V
LOW VOLTAGE
OPERATED



**DUAL
SPEED**



SAFETY
AUTO REVERSE



**ULTRA
RELIABLE**



Installation Mockup



SLIDING GATE OPERATOR



Dimension (mm) :-

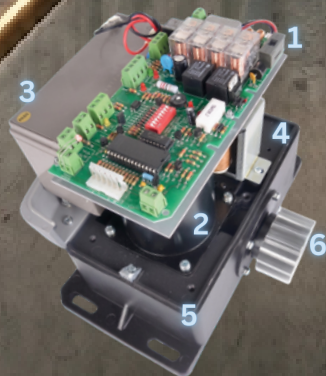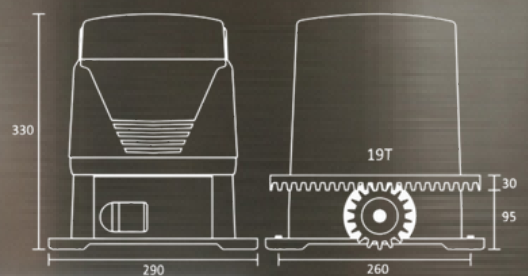

1. Electronic Control Panel
2. Bullmac Motor
3. Backup Battery
4. Power Transformer
5. Grease Type Gear Box
6. Stainless Steel Gear

Operating Voltage	DC24V for normal speed DC12V for chushioning speed	
Max. Output Power	250W	350W
Max. Weight of Gate	1500kg	2000kg
Max. Length of Gate	10 meter	12 meter
DSPC Device	Counter Sensor	Limit Switch Sensor
Lubrication	Grease Type Alloy Base	
Safety Clutch	Electronic current sensing	
Backup Battery	12V 7AH	
Safety Barrier	Infrared beam sensor (Optional)	
Main Supply	AC110V/220V, 60Hz/50Hz	
Electronic Controller	Microcomputer based	
Remote Controller	UHF Digital PWM type	
Temperature	0°C to 80°C	

Some changes may have happened to the product after this brochure is printed. The appearance and feature of the actual product may be slightly different from the illustration.

reserves the right to make technical changes to the product without notice.